ADVANCED SERVICE PROVISIONING BASED ON MOBILE AGENTS

PEYMAN FARJAMI, CARMELITA GÖRG, FRANK BELL

Aachen University of Technology, Germany E-mail: {pemi,cg,bell}@comnets.rwth-aachen.de

Abstract

Service provisioning is currently a challenging issue to offer future telecommunication services efficiently and at the same time in a flexible and user friendly manner. As a contribution of the ACTS CAMELEON [10,11] project to the VHE (Virtual Home Environment) concept of UMTS (Universal Mobile Telecommunication System) [3] this paper describes an advanced approach for service execution and service provisioning based on agent technology.

The mobile and autonomous agent paradigm is a promising new approach for flexible service provisioning as well as automatic feature updates in terminals and network nodes. This paper describes an Adaptive Profile Manager, which is an agent based mechanism that allows a telecommunication user access to his personalised services independent of the used end device (mobile phone, Laptop, PDA,...). The service presentation is adapted to the corresponding end device considering its capacity and system features as well as the specific user profile.

Keywords: Virtual Home Environment (VHE), UMTS, Mobile Agents, Service Provisioning, Service Roaming

1 Introduction

3rd generation Universal Mobile Telecommunication Systems (UMTS) are the realisation of a new generation of mobile communications technology for a world in which personal communications services should allow person-to-person calling, independent of location, the terminal used, the means of transmission (wired or wireless) and the choice of technology. Personal communication services should be based on a combination of fixed and wireless/mobile services to form a seamless end-to-end service for the user. Beyond that UMTS will operate in parallel with pre-UMTS technologies (e.g., GSM, DECT). UMTS will offer the following capabilities:

- provide a wide range of telecommunication services
- provide a single integrated system in which the user can access services in an easy and uniform way in all environments
- allow differentiation between service offerings of various serving networks and home environments
- provide services via hand held, portable, vehicular mounted, movable and fixed terminals, to provide support of roaming users by enabling users to access services provided by their home environment in the same way even when roaming
- provide the flexible integration of new telecommunication services

Service provisioning in UMTS is the overall provision of services to users where a service is defined as a set of functions offered to a user by an organisation. The serving network, which is a possibly often changing access network of the user, provides the user with access to the services.

Pre-UMTS systems have largely standardised the complete set of teleservices, applications and supplementary services. As a consequence, re-engineering is often required to enable new services to be provided and this makes it more difficult for operators to differentiate their services. UMTS will standardise service capabilities and not the services themselves.

It is intended that these standardised capabilities should provide a defined platform which will enable the support of speech, multi-media, messaging, data, user applications etc.

The User Interface (UI) from the end user's point of view should be as flexible as possible and capable of being updated so as to meet the requirements of new services which are still to be envisaged. The activation of UMTS services should be as simple as possible with minimum input expected from the user.

2 VHE (Virtual Home Environment)

The concept of a Virtual Home Environment (VHE) for UMTS was introduced into the standardisation process for the provision and delivery of personalised services across network and terminal boundaries with the *same look and feel*. The concept of the VHE is such that users are consistently presented with the same personalised features, user interface customisation and services in whatever network, whatever terminal (within the capabilities of the terminal), and wherever the user may be located.

The ability to provide such flexible service provisioning has many implications for the network in terms of management, control of services, signalling and also implications to future advanced addressing. The name or number is used to uniquely label the users and addresses are used for routing. The user perspective will be that the name/number will be the way to reach another user but from the network point of view the name/number may not be directly used to reach the called user. A user request for an unknown service will require some means to locate where that service request can be handled or where information can be found on how to handle the service request itself. This may

imply that service control is distributed in the system giving rise to complicated network management protocols and stringent security requirements.

Current developments in GSM such as CAMEL, MEXE and SAT (SIM Application Toolkit) are going some way towards fulfilling the requirements of the VHE and they will also be adopted for UMTS. However, there is scope for other techniques to be employed to meet all the requirements of the VHE.

In the last few years agent technology has spread over many areas, including user interface, personal assistance, mobile computing, information retrieval, telecommunication services and service/network management.

This new technology offers a promising solution to cope with the complexity of open environments, since agent-based solutions can:

- reduce the traffic load (via the autonomy and asynchronous operations of the agents)
- enable on-demand provision of customised services (via dynamic agent migration from the provider system to the current user terminal)
- increase the flexibility, reusability and effectiveness of the software-based problem solutions
- offer the potential to distribute service related processing and a mechanism for nodes in different networks to co-operate in order to provide a service to a user

With these advantages the agent technology can be used in the following areas of the VHE concept.

- Usage of agents for value added service subscription and provision to the user, such as dynamic migration of applications between the user's mobile terminal and the value added service provider. A mobile software agent transports the software to the current terminal and executes it there.
- Usage of agents for mobile communication service provision to the user, such as dynamic downloading of customised mobile communications service logic into terminals. The idea is to provide customised communication capabilities dynamically to the user and increase the intelligence of the terminal.
- Usage of agents for user and service roaming. A mobile software agent can follow the roaming user, even between different mobile communication systems, to represent the user in the foreign network and provide the user's subscribed services.

However, this technology is relatively new and its suitability for solving telecommunications problems needs to be proven in implementations. This paper provides a description of some possible service architectures for personalised service portability in UMTS based on the use of agent technology.

3 Agents in Future Communication Systems

An *agent* is defined as a piece of software that is able to perform a task autonomously on behalf of a user or application, using its intelligence to access distributed resources. A *place* is an execution environment for agents at a specific location. Two types of agents are distinguished: Provider Agents (PA) and Service Agents (SA). A provider agent is permanently available at a fixed location and offers access to local resources. More than one provider agent can exist at a place. The agent that has been given a certain mission and will be using the services of a provider agent is called the *service agent*. The mission of the service agent is a user-defined abstract set of rules in which the agent should act. A service agent can either be generated at a place locally (possibly out of a pool of ready-programmed usable objects) or can be a visitor that has been created elsewhere and was moved to the place, carrying with it the previous state of execution. Other service agents that have been defined in the context of this project are, e.g., the Terminal Agent (TA), describing the basic capabilities of the

terminal and a basic user interface for authentication, and the User Interface Agent (UIA), which provides, e.g., a GUI depending on the currently used terminal.

4 Agent-based Service Provisioning

With the requirements mentioned above in mind an agent-based approach, the Adaptive Profile Manager (APM) has been developed and prototyped within the framework of the CAMELEON project. The APM focuses mainly on the terminal independent service provisioning which is an essential aspect of the VHE concept and will offer the following capabilities:

- Flexible service provisioning
- Remote, network and platform independent modification of all user profiles for different services
- Handling of different terminals with different capabilities for service access
- Automatic download of updated services

A terminal agent (TA) on the currently used terminal provides an interface to the user to authenticate himself and request a service (see Figure 1&2). The terminal agent maintains knowledge of the user terminal profile of the corresponding end device considering its capacity and system features (display type, memory, available bit rate etc.).

-R Terminal Agent Action		PHILIPS
	Available Services PDO Service Information Retrieval ICM Notification ICM InternetRemote DEMO	Securitary, doc 15, 1997 Image: Secure to the AFFECTED Secure to the AFFECTED

Figure 1. Terminal Agent on Laptop

Figure 2. Terminal Agent on PDA

On the service provisioning side the APM Provider Agent (APM-PA) manages the user authentication, the profile adaptation and service requests. It is connected to a central register, where all user data are stored. Each service to be accessed by the user should be registered at the APM. This is performed by the communication between the APM-PA and a so called Service Specific Provider Agent (SS-PA). The services could be implemented on different platforms running on different operating systems, only the APM-PA and SS-PA have to communicate and understand each other. This is achieved by using an inter-agent communication language regardless of the underlying agent platform, e.g. ACL (Agent Communication Language) [5].

Before responding to a service request the APM-PA has to verify whether the terminal agent on the connected terminal is up-to-date or should be updated. If so, the new version of the terminal agent or sub-agents for specific features will migrate to the terminal and will replace the old one. This automatic version control enables the user to always have the current version of the terminal agent without the need of manual downloading.

Once the suitable version of the terminal agent is available on the terminal the user is informed about the currently available services, after a successful authentication process. If there are some new services which the user doesn't know yet he has the possibility to get a demo version of the selected service in order to decide whether he wants to subscribe to it or not.

If the user subscribes to a new service it will be added to the list of subscribed services within the TA (see Figure 1) and the required data for the service subscription are sent from the TA to the APM-PA to be stored in the central register.

Starting a subscribed service, the TA sends the service request to the APM-PA to check whether the user is authorised to access the required service. If so, the APM-PA instructs the so called User Interface Agent (UIA) to transfer the appropriate service specific GUI to the requesting terminal.

The chosen GUI is adapted to the network capabilities and the features of the currently used terminal. The required data concerning the network and terminal capabilities are delivered by the terminal agent when connecting the APM-PA at the beginning of the session.

After the UIA arrives at the terminal the data connection to the APM-PA can be dropped. Here, it can be distinguished between 2 possibilities depending on the realisation of the requested service:

First, the complete service logic can be moved to the terminal; second, the service logic is partially moved to the terminal, in this case a connection (RMI or messaging) between the UIA and the SS-PA is required.

The performance can be enhanced by different methods, e.g., using caching mechanisms to keep the agent code for future service requests and just move the data.

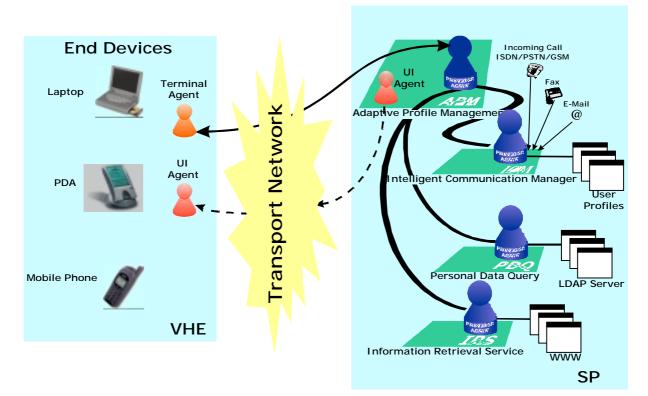


Figure 3. APM architecture

5 Service Prototypes

Currently, the APM provides access to three services namely ICM (Intelligent Communication Manager), PDQ (Personal Data Query), and IRS (Information Retrieval Service) which can be accessed terminal independently and can be presented adaptively to the capabilities of the current terminal and network connection. However, more new services may be added flexibly to the system.

5.1 Intelligent Communication Manager – ICM

The ICM is the core service of the APM system providing a personal communication environment to the user in order to have a flexible and personalised mechanism to control the reachability for all subscribed communication services.

This service offers to the user the possibility to organise and automatically control any kind of incoming communication requests (voice, fax, email, SMS, etc.). The management of personal communication is based on the specification of special conditions (caller/sender, time, subject, etc.) in the so-called user profiles (filter scripts), that can be configured remotely and adapted to the current requirements of the user.

The ICM's main features are as follows:

- Call (voice, fax, email) recording
- Call rejection
- Caller/application interactions via DTMF-detection or voice menu
- Call forwarding/deflection
- User registration/de-registration
- User notification, e.g., via pager service, SMS, or email
- Conversion of recorded voice- and fax messages for sending them as email
- Forwarding of incoming email to a fax machine

A multi-media mailbox informs the user about the recent personal communication activities performed by the ICM, e.g. in order to view the received faxes or emails and to play the recorded voice messages [4].

5.2 Personal Data Query - PDQ

This service offers to the user the possibility to query data from a personal database by SMS (e.g., address, telephone/fax/mobile phone number, email address, birthdays and others).

The personal data are stored in an LDAP (Lightweight Directory Access Protocol) database which can be accessed by the PDQ service through the JNDI (Java Naming and Directory Interface) interface.

This information can either be stored on a local LDAP server or on any LDAP server which is accessible via the Internet.

An incoming SMS contains a personal data query which should be performed by the LDAP server. The results in turn will be sent to the user via SMS [7].

There are several possibilities to send and receive SMS messages:

- Via air interface if the server is connected to a GSM module
- Sending and receiving SMS messages as email
- Using the ISDN gateway of the SMSC to send SMS messages

5.3 Information Retrieval Service - IRS

This service itself is a totally agent-based service offering the user an efficient retrieval service for information, that is distributed over different platforms in heterogeneous networks. An example is the automatic booking of flights or other travel arrangements in the Internet. The user delegates certain functions, e.g., find a flight at a date and time to a certain city, without having to know about details of the task execution. Any information service (e.g., WWW pages, LDAP databases, etc.) with data important for the user can be accessed. The mobile agent with a certain degree of autonomy collects the information and returns with an evaluated result back to the current terminal of the user.All services (ICM, PDQ and IRS) explained above can be accessed over the APM offering the adaptation of the service presentation according to the end device specific parameters [1,2,7].

6 Underlying Agent Platform

The development and prototyping of APM and the integration of described services are based on the *Voyager* [12] agent platform. The central register for user data is realised by an LDAP (Lightweight Directory Access Protocol) server.

The ObjectSpace Voyager platform is a development platform and object request broker for distributed Java-based applications. It allows the usage of a regular message syntax to construct remote objects, Messaging between distributed objects and code migration.

The core item of any agent system designed using the Voyager development platform is the host and execution environment called the Voyager server. Starting a Voyager server is a prerequisite for running Java programs that use the remote functions provided by the Voyager system. The Voyager server is the "place" that hosts permanent *provider agents* and temporary *service agents*.

In a distributed computing scenario, it is necessary to have a Voyager server installed on every machine that will take part in order to play the role of a "place" for permanent and temporary agents. A Java Development Kit (JDK) has to be available on any such machine as well. Voyager servers can be invoked manually or from within a Java program. In both cases, a user must have the authority to log into that machine in order to start the server. A server cannot be started remotely. However, once started, the server allows execution of remote software objects from users that have no authority to log into the machine hosting the server.

Voyager servers can act either as a "server" or a "client". A Voyager server acting as a *client* exerts the function of a "home place". It allows, e.g., the launching of agents, their dispatching to other places and it also enables them to return. However, acting as a client it cannot receive messages or host software objects other than the ones created there. A Voyager server acting as a *server* can host any remote software object, handle messages to those objects and even act as a code server to distribute class files for remote locations.

The main features of the ObjectSpace VoyagerPro are described in the following:

6.1 Using remote objects

A remote object can be used within a local Java program, if a handle to this object exists. In VoyagerPro this handle is called a *proxy*, meaning that it exists locally and the methods of the remote object can be used as if they were local.

6.2 *Remote construction*

It is possible to create a remote instance of any class and obtain a proxy to the newly created object. The proxy implements the same interfaces as the created object and the proxy class is generated dynamically if it doesn't already exist.

6.3 Naming service

The VoyagerPro naming service is called *Namespace*. Each object that wants to make its methods available to other objects must bind its URL (Uniform Resource Locator as used for the World Wide Web) to the Namespace. When a program looks up a remote object in this namespace, the URL must be given and, upon finding the object, a proxy to the object is returned. VoyagerPro supports also other naming services like: CORBA, JNDI, RMI registry, etc..

6.4 Messaging

VoyagerPro distinguishes between two kinds of messaging: *Remote Messaging* and *Advanced Messaging*. Remote Messaging is defined as method calls made to a proxy, that are forwarded to its object. If the object is in a remote program, the arguments are serialised and later de-serialised at the destination. Advanced Messaging is a VoyagerPro messaging mechanism for synchronous and asynchronous messaging.

6.5 Autonomous mobile agents

With VoyagerPro autonomous mobile agents can be created that move themselves between different hosts and continue to execute upon arrival.

6.6 Dynamic class loading

Classes can be dynamically loaded from one or more locations when necessary. This allows to set up class repositories that serve a distributed system with Java applications.

7 Example Scenario

The following scenario describes the usage of the Information Retrieval Service through the APM illustrated in Figure 4.

After the user authentication and service request through the terminal agent (TA) on a Laptop the corresponding GUI is transported to the terminal (Laptop) by the user interface agent (UIA). Now the user enters the data he is looking for (e.g. find the best flight offer to London on next Monday). After sending the agent with the query (mission) the connection can be dropped. After a while the IRS service agent will come back to the IRS provider agent to deliver the found information. To present the retrieved result on the terminal the UIA has to move to the terminal. As the terminal is not connected to the network the UIA is set to the *wait* status by the APM-PA and the results are stored. The next time, the user logs into the system via the TA - it could be another terminal like a PDA for example- the UIA is alerted by the APM-PA and migrates with the appropriate GUI accordingly to the currently used terminal to present the retrieved results.

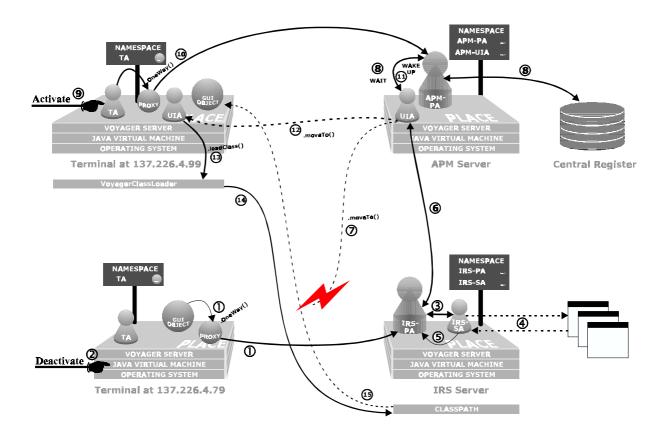


Figure 4. Using the IRS service

All steps through this scenario are described in the following:

- 1. The UIA sends the entered information to the IRS-PA
- 2. The user terminates the TA on his current terminal
- 3. The IRS-PA activates the IRS-Service Agent
- 4. The IRS-Service Agent moves to the corresponding content provider in order to accomplish his task
- 5. The found results are passed to the IRS-PA
- 6. The UIA is instructed to bring the results to the user
- 7. First, the UIA attempts to move to the terminal from which the user sent his query
- 8. The UIA is set in the waiting mode, as the user is not available at his former terminal any more
- 9. The user starts the TA on another terminal
- 10. The user and terminal data are sent to the APM-PA
- 11. The UIA is alerted by the APM-PA and receives the updated user and terminal data
- 12. The UIA moves to the current terminal of the user
- 13. The UIA attempts to load the required classes
- 14. The classes are loaded from the IRS server
- 15. The results can be presented according to the capacities of the current terminal

8 Conclusion

Sophisticated mobile agent technology will allow flexible service provisioning, execution and access for future telecommunication networks and services. Agent technology allows the co-existence of different types of agents: e.g., intelligent, autonomous, and mobile. These agents can use the same mechanisms for communication and thus allow a very flexible service architecture. This will lead to

more reliable and performant services. A failure of a central service node will affect less users and the intelligent distribution will decrease the signalling load in the network. The results and experiences in the CAMELEON project have shown that agent technology is a very promising field which can be integrated with other technologies (e.g., MExE, SAT, CAMEL/IN). Mainly security and performance aspects will determine the long term employment and interworking of these technologies in future networks.

9 Abbreviations

APM	Adaptive Profile Manager		
APM-PA	Adaptive Profile Manager-Provider Agent		
AWT	Abstract Window Toolkit		
CAMEL	Customised Applications for Mobile networks Enhanced Logic		
CAMELEON	Communication Agents for Mobility Enhancements in a Logical Environment of		
	Open Networks		
DECT	Digital Enhanced Cordless Telecommunication		
GSM	Global System for Mobile communications		
GUI	Graphical User Interface		
ICM	Intelligent Communication Manager		
IN	Intelligent Network		
IRS	Information Retrieval Service		
JDK	Java Development Toolkit		
JNDI	Java Naming and Directory Interface		
LDAP	Lightweight Directory Access Protocol		
MExE	Mobile station application Execution Environment		
PDA	Personal Digital Assistant		
PDQ	Personal Data Query		
SA	Service Agent		
SAT	SIM Application Toolkit		
SMS	Short Message Service		
SMSC	Short Message Service Center		
SS-PA	Service Specific-Provider Agent		
ТА	Terminal Agent		
UIA	User Interface Agent		
UMTS	Universal Mobile Telecommunication System		
VHE	Virtual Home Environment		

10 References

- 1. F. Bell, Concept and Implementation of an Agent Based and End Device Independent Access Mechanism for the Telecommunication User, Master Thesis, Communication Networks, University of Technology Aachen, March 1999.
- 2. M. A. Döll, Requirement Analysis, Concept and Realisation of an Agent based Platform-Independent Information Retrieval System, Master Thesis, Communication Networks, University of Technology Aachen, October 1998.
- 3. ETSI TS 22.70 Universal Mobile Telecommunication System (UMTS), Service Aspects: Virtual Home Environment (VHE). UMTS Draft Version 3.0.0, 1998.
- 4. P. Farjami, S. Kluwe: Java-Based Personal Communication Management. In ITG-Fachbericht 153 Internet frischer Wind in der Telekommunikation, pp.193-200, ITG-Fachtagung, Stuttgart, October 1998, VDE-Verlag

- 5. FIPA. Foundation for Intelligent Physical Agents, ACL Agent Communication Language. Specification, part 2., 1997.
- 6. J. Hartmann, C. Görg, P. Farjami: Agent Technology for the UMTS VHE Concept. In Proceedings of the First ACM International Workshop on Wireless Mobile Multimedia in Conjunction with ACM/IEEE MobiCom'98, pp. 203-208, University of North Texas, Dallas, USA, October 1998, ACM
- 7. L. Holthausen, Conception and Implementation of an Information Service Using a Personal Information Server Based on the Short Message Service (SMS) of the Mobile Networks, Master Thesis, Communication Networks, University of Technology Aachen, October 1998.
- 8. H. Long, Performance Analysis of Mobile Agents for Future Telecommunication Services, Master Thesis, Communication Networks, University of Technology Aachen, February 1999.
- 9. FIPA. Foundation for Intelligent Physical Agents http://www.cselt.stet.it/fipa/
- 10. CAMELEON project http://www.comnets.rwth-aachen.de/~cameleon
- 11. CLIMATE ACTS Cluster for Intelligent Mobile Agents in Telecommunication Environments http://www.fokus.gmd.de/cc/ima/climate/
- 12. Voyager agent platform http://www.objectspace.com

11 Biographies

Peyman Farjami received his Dipl. –Ing. degree in electrical engineering from Aachen University of Technology, Germany in 1996. Since 1997 he is research assistant and PHD student at the Department of Communication Networks, Aachen University of Technology. His main research interests are Javabased value added services, personal communication management and mobile agents. In addition he is supervising and coaching practical exercises, semestral and master's theses in his research area. He is member of the ITG and VDE, and author of technical papers on intelligent Communication management and mobile agent based services in telecommunication networks.

Carmelita Görg Carmelita Görg received the Dipl.-Inform. degree in computer science from the University of Karlsruhe, Germany in 1976, and the Dr. rer. nat. degree from Aachen University of Technology, Germany in 1984 for her dissertation in the field of queueing strategies for communication networks. From 1985 until 1989 she worked as a consultant in the field of communication networks. From 1989 until 1999 she worked as a group leader at the Communication Networks Institute, Aachen University of Technology, Germany, where she received the certificate of habilitation in 1997. In 1999 Dr. Görg joined Bremen University as a professor for Communication Networks. Her research interests are: performance analysis of communication networks, stochastic simulation, rare event simulation, high speed networks, personal communication, and new services in telecommunication networks.

Frank Bell received his Dipl. –Ing. degree in electrical engineering from Aachen University of Technology, Germany, in 1999. His master's thesis has been performed at the Department of Communication Networks in the framework of the ACTS CAMELEON project. Now, he is working as a consultant for CMG.